

H CRIMP 110



Enskede Hydraul AB, Bergsgatan 26, 740 46 ÖSTERVÅLA, tel. 0292-106 30, www.enskedehydraul.se

The assembly moves with us.



H CRIMP 110




TECHNICAL DATA

Capacity: 1" 4 SP
Crimp range: 4 - 43 mm
Crimp strength: 110 T
Opening with dies: +20 mm
Total opening: 59 mm
Length of dies carriers : 60 mm
Weight:
21 kg (head only)
28 kg (Complete machine)
Separate pump

ADVANTAGES

- ⊗ Head separate from pump
- ⊗ Light
- ⊗ Easy use
- ⊗ Stable and robust
- ⊗ Portable
- ⊗ Rotatable

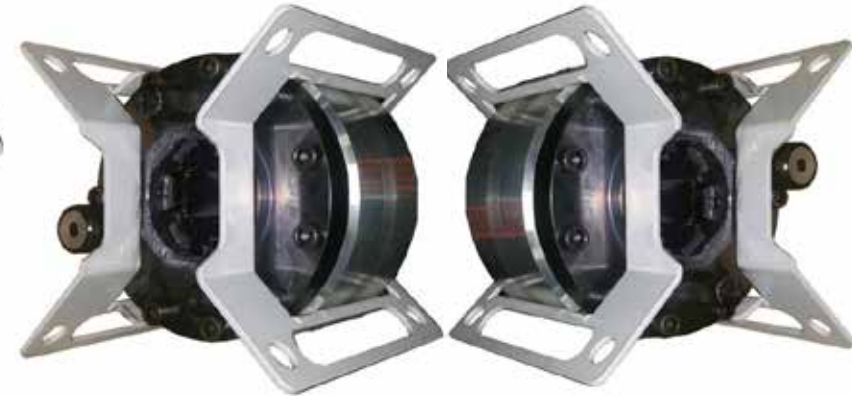

Enskede Hydraul AB, Bergsgatan 26, 740 46 ÖSTERVÅLA, tel. 0292-106 30, www.enskedehydraul.se

The assembly moves with us.

ENSKEDE
HYDRAUL AB

H CRIMP 110



Enskede Hydraul AB, Bergsgatan 26, 740 46 ÖSTERVÅLA, tel. 0292-106 30, www.enskedehydraul.se

The assembly moves with us.

ENSKEDE
HYDRAUL AB